



PVC insulated, PVC sheathed / 60 °C / 600V

Application

Power supply cord for indoor small electrical instruments


Product Description

Standard	<PS>E JET JIS C 3342
Conductor	Stranded bare copper
Temp. / Rate	60 °C
Voltage Rate	600V
Insulation/Jacket	Heat resistant PVC which is RoHS Complied wire.



Construction

VVF Flat Type

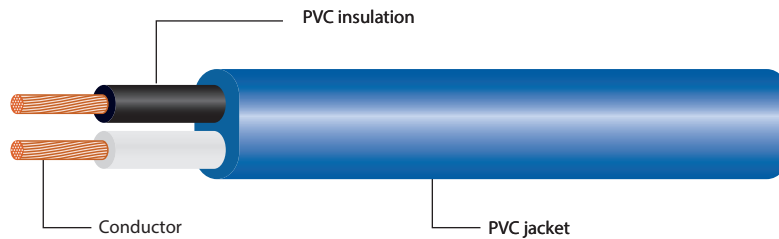

Wire Size		Conductor (No./mm)	NO. of core	Insulation Thickness (mm)	Jacket Thickness (mm)	Overall Diameter Approx (mm)	Maxium Conductor resistance (Ω - Km)	MinimuA Minimum Insulation resistance (Ω - Km)	Standard Put - Up (M/Coil)
(mm)	(mm ²)								
1.0	-	1/1.000	2	0.80	1.5	5.60x8.20	22.8	50	100
1.2	-	1/1.200		0.80		5.80x8.60	15.8		
1.6	-	1/1.600		0.80		6.20x9.40	8.92		
2.0	-	1/2.000		0.80		6.60x10.50	5.65		
2.6	-	1/2.600		1.00		7.60x12.50	3.35		
3.2	-	1/3.200		1.20		8.60x14.50	2.21		
-	2.0	7/0.600		0.80		6.40x9.80	9.24		
-	3.5	7/0.800		0.80		7.00x11.00	5.20		
-	5.5	7/1.000		1.00		8.00x13.00	3.33		
-	8	7/1.200		1.20		9.00x15.00	2.31		
1.0	-	1/1.000	3	0.80	1.5	5.60x11.00	22.8	50	100
1.2	-	1/1.200		0.80		5.80x11.50	15.8		
1.6	-	1/1.600		0.80		6.20x13.00	8.92		
2.0	-	1/2.000		0.80		6.60x14.00	5.56		
2.6	-	1/2.600		1.00		7.60x17.00	3.35		
3.2	-	1/3.200		1.20		8.60x20.00	2.21		
-	2.0	7/0.600		0.80		6.40x13.50	9.24		
-	3.5	7/0.800		0.80		7.00x15.00	5.20		
-	5.5	7/1.000		1.00		8.00x18.00	3.33		
-	8.0	7/1.200		1.20		9.00x21.00	2.31		