



PVC insulated / PVC sheathed / 60,105 °C / 300V

Application


- SPT-1 SPT-2 NISPT-1 NISPT-2 For use in household clocks, fans, radios and similar appliances.
- SPT-3 For heavy-duty use in damp location: especially suitable for refrigerators and room-size air conditioners.
- UL 20288 For use in chain link of chain suspended lighting fixtures.

Product Description


- Bare stranded copper conductor,
- Color-coded PVC insulation. (Lead Free)
- Rated temperature: 60 °C or 105 °C, Rated voltage: 300 V
- Pass UL VW-1 & CSA flame test.

Construction

NISPT CABLE

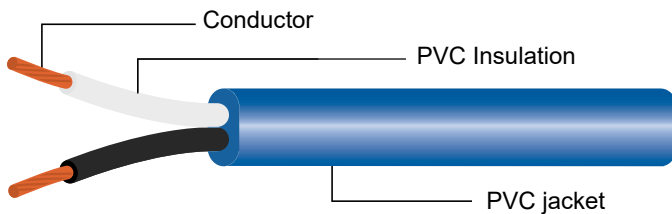

SPT CABLE

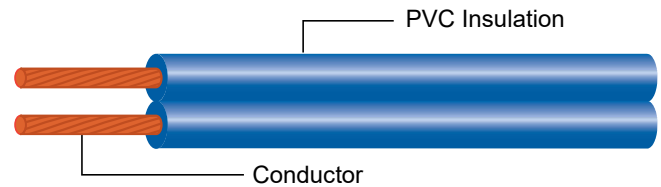

UL Style & CSA Type	Conductor		No. OF Core	Insulation Thickness		Overall Diameter (mm)	Standard Put-Up	
	(AWG)	(No./mm)		(mm)	(mm)		(ft/coil)	(M/coil)
SPT-1	18	41/0.160	2	0.76		2.70 x 5.40	1000	305
	18	41/0.160	3			2.70 x 8.00	1000	305
SPT-2	18	41/0.160	2	1.14		3.50 x 7.00	1000	305
	16	65/0.160	2			3.70 x 7.20	1000	305
	18	41/0.160	3			3.50 x 8.60	1000	305
	16	65/0.160	3			3.80 x 9.60	1000	305
	18	41/0.160	2			1.52	4.40 x 8.70	1000
SPT-3	16	65/0.160	2	1.52	4.6 x 9.10	1000	305	
	14	41/0.253	2	2.03	6.00 x 10.80	500	305	
	12	65/0.253	2	2.41	7.40 x 14.00	500	152	
	10	105/0.253	2	2.79	9.10 x 18.20	500	152	
	18	41/0.160	3	1.52	4.40 x 10.70	1000	305	
	16	65/0.160	3	1.52	4.75 x 11.80	500	152	
	14	41/0.253	3	2.03	6.00 x 14.50	500	152	
	12	65/0.253	3	2.41	7.00 x 15.40	500	152	
	10	105/0.253	3	2.79	9.10 x 18.80	500	152	
UL 20288	18	41/0.160	2	1.02		3.25 x 5.80	1000	305
NISPT-1	18	41/0.160	2	INSU	JKT THICK	Thick Bet. Cond.	Overall Dia (APPROX)	305
				0.38	0.55			
NISPT-2	18	41/0.160	2	0.76	0.55	0.51	3.90 x 7.30	305
	16	65/0.160	2	0.76	0.55	0.51	4.20 x 7.80	305