


### Application

Internal wiring of electrical, electronic and medical equipment.

### Product Description

- Standard** UL, CUL
- Conductor** Solid , Strand and OS-1 either tinned or bare copper
- Rating** 80°C 30 V
- Flammability** UL VW-1, CUL FT1
- Insulation** Heat resistant PE which is RoHS Complied wire.
- Usage** Uniform thickness of wire to ensure easy stripping and cutting  
Resistant to acids, oils, alkalines, moisyure and fungus

### Construction

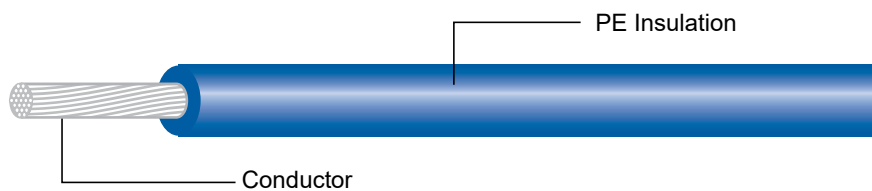

UL Style CUL Type	Conductor		Insulation Thickness (mm)	Overall Diameter Approx (mm)	Standard Put-Up	
	(AWG)	No/m m			(ft/coil)	(M/coil)
UL 10627	30	7/0.102	0.25	0.82	11500	3500
	28	7/0.127		0.90		
	26	7/0.160		1.00		
	24	7/0.203		1.10	2000	610
	22	7/0.253		1.30		
	20	7/0.320		1.50		
	18	7/0.404		1.70		
	16	26/0.253		2.00		
	14	41/0.253		2.60		
	12	65/0.253		3.10	1000	305
	10	105/0.255		3.90		