




Application

Internal wiring of electrical, electronic and medical equipment.

Product Description

- Standard** UL, CUL AWM I A
- Conductor** Solid , Strand and OS-1 either tinned or bare copper
- Rating** 80 °C 300V
- Flammability** UL VW-1, CUL FT1
- Insulation** Heat resistant PVC which is RoHS Complied wire.
- Usage** Uniform thickness of wire to ensure easy stripping and cutting
Resistant to acids, oils, alkalines, moisyure and fungus

Construction

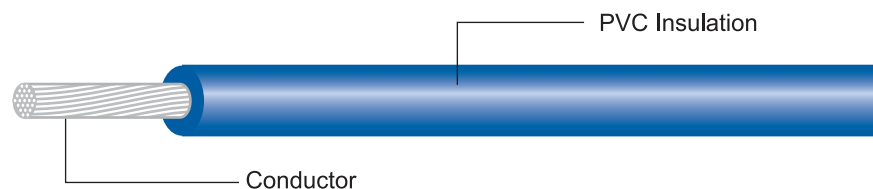

UL Style CUL Type	Conductor		Insulation Thickness (mm)	Overall Diameter Approx (mm)	Standard Put-Up	
	(AWG)	No/mm			(ft/coil)	(M/coil)
UL 10913	30	7/0.102	0.46	1.27	11500	3500
	28	7/0.127		1.35		
	26	7/0.160		1.45		
	24	7/0.203		1.58	2000	610
	22	7/0.253		1.73		
	20	7/0.320		1.92		
	18	7/0.404		2.19		
	16	26/0.253		2.45		
UL 1095	30	7/0.102	0.34	0.95	11500	3500
	28	7/0.127		1.05		
	26	7/0.160		1.15		
	24	7/0.203		1.30	2000	610
	22	7/0.253		1.45		
	20	7/0.320		1.60		
	18	7/0.404		1.90		
	16	26/0.253		2.25		