




Application

Internal wiring of electrical, electronic and medical equipment.

Product Description

- Standard** UL, CUL
- Conductor** Solid , Strand and OS-1 either tinned or bare copper
- Rating** 105°C 600V
- Flammability** UL VW-1, CUL FT1
- Insulation** Heat resistant PVC which is RoHS Complied wire.
- Usage** Uniform thickness of wire to ensure easy stripping and cutting
Resistant to acids, oils, alkalines, moisyure and fungus

Construction

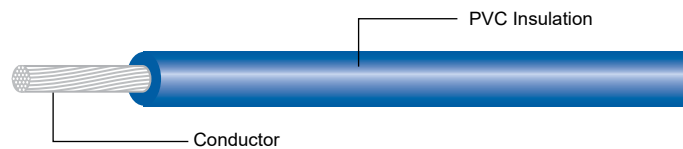

UL Style CUL Type	Conductor		Insulation Thickness (Minimum Average) (mm)	Overall Diameter Approx (mm)	Standard Put-Up	
	(AWG)	No/mm			(ft/coil)	(M/coil)
UL 1230	26	7/0.160	0.76	2.20	2000	610
	24	7/0.203		2.30		
	22	7/0.253		2.50		
	20	7/0.320		2.70		
	18	7/0.404		2.90		
	16	26/0.253		3.20		
	14	41/0.253		3.60		
	12	65/0.253		4.10		
UL 1283	10	105/0.253	1.53	5.20	305	100
	8	165/0.253		7.70		
	6	266/0.253		8.80		
	4	420/0.253		10.20		
UL 1897	2	665/0.253	0.89	12.00	2000	610
	26	7/0.160		2.50		
	24	7/0.203		2.60		
	22	7/0.253		2.70		
	20	7/0.320		2.90		
	18	7/0.404		3.20		
	16	26/0.253		3.50		
	14	41/0.253		3.90		
	12	65/0.253		4.30		
	10	105/0.255		5.40		
	8	165/0.253		6.30		
	6	266/0.253		7.50		
4	420/0.253	8.90				