


Application

Internal wiring of Appliance

Product Description

Standard	UL
Conductor	Either tinned or bare copper
Rating	105 °C 600V
Flammability	UL VW-1
Insulation	Heat resistant PVC which is RoHS Complied wire.
Usage	Uniform thickness of wire to ensure easy stripping and cutting Resistant to acids, oils, alkalines, moisyure and fungus

Construction

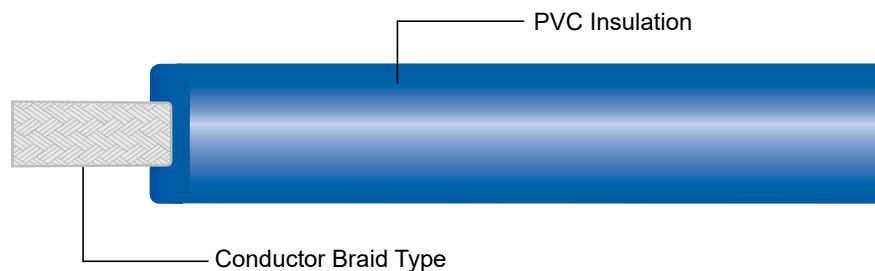

UL Style	Conductor		Width of Braid (mm)	Insulation Thickness (mm)	Overall Diameter Approx (mm)	Standard Put-Up	
	(AWG)	(No./mm)				(ft/coil)	(M/coil)
UL 1500	20	48/0.12	2.0	0.78	1.80 x 3.60	2000	610
	19	64/0.12	3.0		1.90 x 4.60		
	18	80/0.12	3.7		1.90 x 5.40		
	17	96/0.12	4.3		1.90 x 6.10		
	16	128/0.12	5.0		1.90 x 6.90		
	15	144/0.12	5.5		1.90 x 7.20		
	14	192/0.12	6.0		1.90 x 7.60		
	13	144/0.16	6.6		2.00 x 8.30		
	12	144/0.18	7.0		2.00 x 8.60		
	11	192/0.18	7.8		2.00 x 9.50		