


Application

Internal wiring of electrical, electronic and medical equipment.

Product Description

- Standard** UL, CULAWMTR-64
- Conductor** Solid , Strand and OS-1 either tinned or bare copper
- Rating** 80 °C 30V
- Flammability** UL VW-1, CUL FT1
- Insulation** Heat resistant PVC which is RoHS Complied wire.
- Usage** Uniform thickness of wire to ensure easy stripping and cutting
Resistant to acids, oils, alkalines, moisyure and fungus

Construction

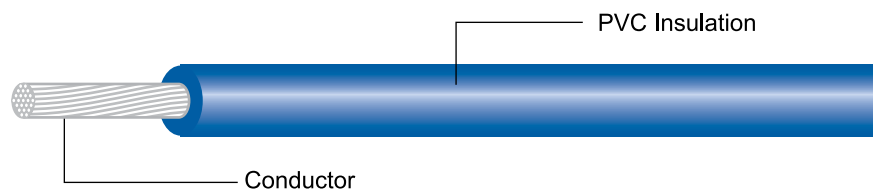

| UL Style CUL Type | Conductor | | Insulation Thickness (mm) | Overall Diameter Approx (mm) | Covering | Standard Put-Up | |
|----------------------|-----------|----------|---------------------------------|---------------------------------------|----------|-----------------|----------|
| | (AWG) | No/m m | | | | (ft/coil) | (M/coil) |
| UL 1792 | 32 | 7/0.080 | 0.25 | 0.75 | Optional | 11500 | 3500 |
| | 30 | 7/0.102 | | 0.82 | | | |
| | 28 | 7/0.127 | | 0.90 | | | |
| | 26 | 7/0.160 | | 1.00 | | 10000 | 3050 |
| | 24 | 7/0.203 | | 1.20 | | 2000 | 610 |
| | 22 | 7/0.253 | | 1.30 | | | |
| | 20 | 7/0.320 | | 1.50 | | | |
| | 18 | 7/0.404 | | 1.80 | | | |
| | 16 | 26/0.253 | | 2.00 | | | |