


Application

Internal Wiring of Class 2 Circuits in Audio, Video and Electronic Equipment.

Product Description

- Standard** UL, CUL AWM T1 IA
- Conductor** Solid , Strand both bare copper and tinned coated copper
- Rating** 60,80,90,105°C 30V
- Flammability** UL VW-1, CUL FT1
- Insulation** Lead free heat resistant PVC
- Usage** Uniform thickness of wire to ensure easy stripping and cutting
Resistant to acids, oils, alkalines, moisture and fungus

Construction

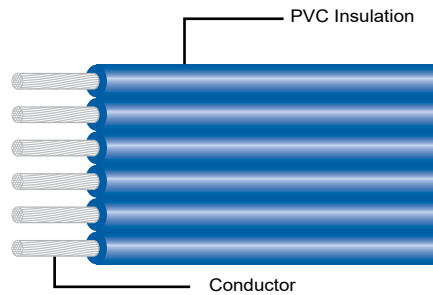

UL Style CUL Type	Conductor		Insulation Thickness (mm)	Number of Cores	Overall Diameter Approx (Width)		Overall Diameter Approx (Length)		Standard Put-Up	
	(AWG)	No/mm			(mm) W	(mm) L	(ft/coil)	(M/coil)		
UL20080	32	7/0.080	0.25	6	0.75	4.50	2000	610		
	30	7/0.102			0.80	4.80				
	28	7/0.127			0.90	5.40				
	26	7/0.160			1.00	6.00				
	24	7/0.203			1.20	7.20	1000	305		
	22	7/0.253			1.30	7.80				
	20	7/0.320			1.50	9.00				
	18	7/0.404			1.80	10.80				
	16	26/0.253			2.00	12.00				