


Application

Internal wiring of electronic equipment and appliances. Tags may indicate the following:
600 volts Peak for Electronic use only

Product Description

- Standard** UL, CUL
- Conductor** Solid , Strand both bare copper and tinned coated copper
- Rating** 80°C 300V
- Assembly** Consists of two or more conductors, twisted pairs or groups of twisted conductors twisted together.
- Style** Multiple-conductor cable using non-integral jacket

Construction

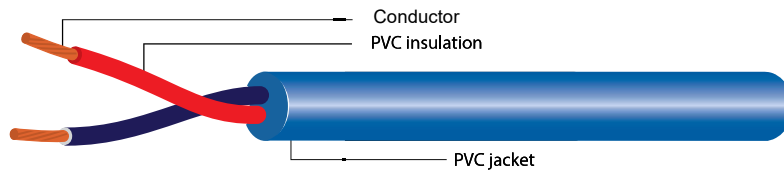

UL Style CUL Type	Conductor		Strand OD (Approx) (mm)	Insulation Thickness (mm)	Number of Core	Covering	Shield	Inner Core Diameter Approx (mm)	Jacket thickness (mm)	Over All Diameter Approx (mm)	Standard Put-Up	
	(AWG)	No/mm									(ft/coil)	(M/coil)
UL 2095	32	7/0.080	0.2	0.38	2	Optional	Optional	2.0	0.40	2.9	2000	610
	30	7/0.102	0.3					2.1		3.0		
	28	7/0.127	0.4					2.3		3.2		
	26	7/0.160	0.5					2.5		3.4		
	24	7/0.203	0.6					2.8		3.6		
	22	7/0.253	0.8					3.1		3.9		
	20	7/0.320	1.0					3.5		4.4		
	18	7/0.404	1.2					4.0		4.9		
	16	26/0.253	1.5					4.5		5.4		

More 2 Core : Contact sales office