


Application

UL 2919 Internal wiring or external interconnection in Class 2 Circuits of electronic computers and electric business machine
 UL 2990 Internal Wiring or External Interconnection of Electronic Equipment, class 2 circuits only.

Product Description

Standard	UL, CUL
Conductor	Solid , Strand both bare copper and tinned coated copper
Rating	80°C 30V
Assembly	Twisted pairs or groups of twisted conductors twisted together

Construction

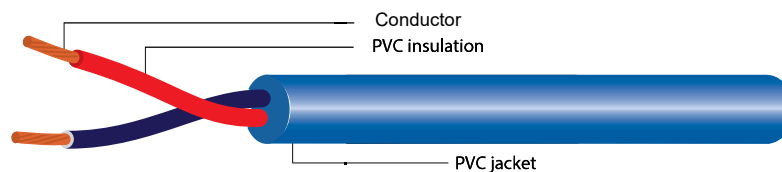

UL Style CUL Type	Conductor		Insulation Thickness (mm)	Number of Cores	Covering	Shield	Inner Core Diameter Approx (mm)	Jacket thickness (Minimum Average) (mm)	Over All Diameter Approx (mm)
	(AWG)	No/m m							
UL 2919	32	7/0.080	0.30	2	Optional	Optional	1.70	0.76	3.37
	30	7/0.102					1.90		3.50
	28	7/0.127					2.00		3.70
	26	7/0.160					2.20		3.80
	24	7/0.203					2.50		4.20
	22	7/0.253					2.80		4.40
	20	7/0.320					3.20		4.90
	18	7/0.404					3.70		5.40
	16	26/0.253					4.20		5.90
UL 2990	32	7/0.080	0.30	2	Optional	Optional	1.69	0.76	3.37
	30	7/0.102					1.90		3.50
	28	7/0.127					2.00		3.70
	26	7/0.160					2.20		3.80
	24	7/0.203					2.50		4.20
	22	7/0.253					2.80		4.40
	20	7/0.320					3.20		4.90
	18	7/0.404					3.70		5.40
	16	26/0.253					4.20		5.90