


Application

Internal wiring of electrical, electronic and medical equipment and in appliances with the working high temperature

Product Description

- Standard** UL, CUL
- Conductor** Solid , Strand and OS-1 either tinned or bare copper
- Rating** UL 3289 150 °C 600V
UL 3389 150 °C 300V
- Flammability** UL VW-1, CUL FT1
- Insulation** Heat resistant XLPE which is cross-linked by electron beam machine and stable thermally
- Usage** Uniform thickness of wire to ensure easy stripping and cutting
Resistant to acids, oils, alkalines, moisyure and fungus which are excellent compared with normal PVC wire

Construction

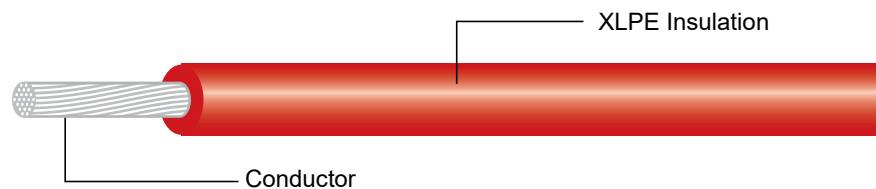

UL Style CUL Type	Conductor		Insulation Thickness (mm)	Overall Diameter Approx (mm)	Standard Put-Up		Conductor Resistance at 20 °C (ohm/km)
	(AWG)	(No./mm)			(ft/coil)	(M/coil)	
UL 3398 AWM I A/B (Stranded)	30	7/0.102	0.38	1.07	11500	3500	381.00
	28	7/0.127		1.15	11500	3500	239.00
	26	7/0.160		1.25	10000	3050	150.00
	24	11/0.160		1.37	2000	610	94.20
	22	17/0.160		1.52	2000	610	59.40
	20	21/0.180		1.71	2000	610	36.70
	18	34/0.180		1.97	2000	610	23.20
	16	26/0.253		2.25	2000	610	14.60
UL 3398 AWM I A/B (Solid)	26	1/0.404	0.76	1.23	2000	610	143.00
	24	1/0.511		1.35	2000	610	89.30
	22	1/0.643		1.50	2000	610	56.40
	20	1/0.813		1.70	2000	610	35.20
	18	1/1.024		1.94	2000	610	22.20
	16	1/1.290		2.25	2000	610	14.00
UL 3289 CL 1251 (Stranded)	30	7/0.102	0.76	1.83	11500	3500	381.00
	28	7/0.127		1.91	11500	3500	239.00
	26	7/0.160		2.01	10000	3050	150.00
	24	11/0.160		2.13	2000	610	94.20
	22	17/0.160		2.28	2000	610	59.40
	20	21/0.180		2.47	2000	610	36.70
	18	34/0.180		2.73	2000	610	23.20
	16	26/0.253		3.01	2000	610	14.60
UL 3289 CL 1251 (Solid)	26	1/0.404	0.76	1.99	2000	610	143.00
	24	1/0.511		2.11	2000	610	89.30
	22	1/0.643		2.26	2000	610	56.40
	20	1/0.813		2.46	2000	610	35.20
	18	1/1.024		2.70	2000	610	22.20
	16	1/1.290		3.01	2000	610	14.00