


### Application

- For use as wiring in christmas lighting sets.

### Product Description

- Bare stranded copper conductor, 20-18 AWG
- Color-coded PVC insulation. (Lead Free)
- XTW: braidless parallel cords.
- CXTW Single Cord
- Pass VW-1 flame test.
- Rated temperature: 105 °C, 300 V

### Construction

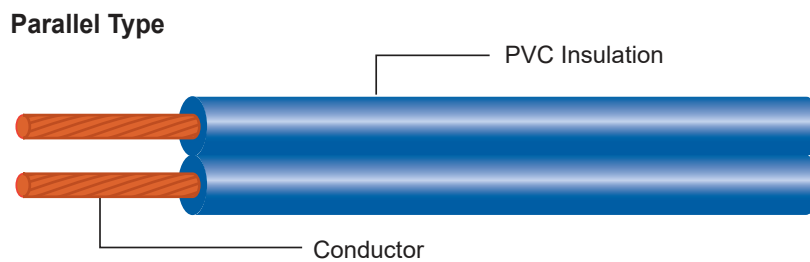

UL Style & CSA Type	Conductor		Core No.	Insulation Thickness (mm)	Overall Diameter Approx (mm)	Standard Put-Up	
	(AWG)	(No./mm)				(ft/coil)	(M/coil)
UL XTW (Parallel)	20	26/0.160	2	0.76	2.50 x 5.00	2000	610
	18	41/0.160	2		2.80 x 5.60	2000	610
UL CXTW (Single)	22	17/0.160	1	0.76	2.30	2000	610
	20	26/0.160	1		2.50	2000	610
	18	41/0.160	1		2.80	2000	610