

**SEALING COMPOUND AND FIBER FOR EYS, EYK , EYD SERIES EXPLOSION PROOF**



A. QUALITY PRODUCT

**APPLICATION**

The Sealing Fiber

Forms a positive dam to hold sealing compound in the sealing fitting.

The Sealing Compound

For seal forming between and around each electrical conductor inside of sealing fitting to restrict the passage of gases, vapors and flames.


**TECHNICAL DATA**

The Sealing Fiber is a rope the asbestos fiber that easy to form a dam and non-flammable.


The Sealing Compound is water soluble powder, that can be easily mixed and poured.

Mix 2 parts by volume of Sealing Compound with 1 part of clean water in a completely clean container.


Stir immediately and thoroughly then pour into the sealing fitting. Compound harden in 60 minutes then form a secure non-shrinking, acids, water and oil resistant seal.



EYS Vertical seal

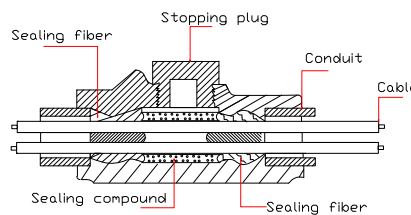

EYK Horizontal seal

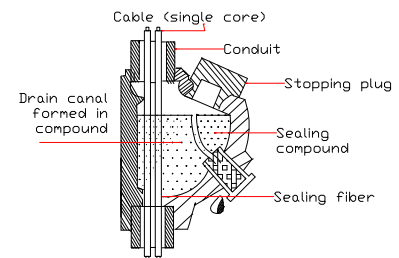

EYD Vertical seal and Water drain

Depth of sealing compound should be equal to the trade size of conduit, having a minimum of 5/8 inch thickness. Close a plug immediately after pouring.

**Caution:** Do not mix more than it can be poured within 10 minutes after adding water. Use cold water, warm water increases speed of setting. Partical of previous mixing or dirt may spoil the seal. KEEP DRY and tightly closed when it is not in used.